


DA-F-02YS2Y 25*2*AWG24/1



1. Category: 5

2. Construction: see figures

- 1) Conductor: bare copper wire, AWG 24/1
- 2) Insulation: foamed PE(skin-foam-skin)
 Color code: white/blue, white /orange, white /green, white /brown, white/grey
 Red/blue, red/orange, red /green, red/brown, red/grey
 Black/blue, black/orange, black /green, black /brown, black/grey
 Yellow/ blue, yellow/orange, yellow /green, yellow /brown, yellow /grey
 Purple/ blue, purple/orange, purple /green, purple /brown, purple /grey
- 3) Pair: 25 twisted pairs
- 4) Center filler: PVC tube
- 5) Filler: water-retardant petrolatum
- 6) Tape: Polyester
- 7) Outer sheath: PE (black; RAL 6008)

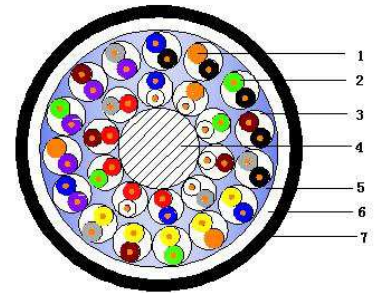

3. Electronic characteristics at 20°C:

DC resistance (max.)	93.5 Ohm/km
Insulation resistance (min.)	5 Gohm x km
Mutual capacitance (app.)	54 nF/km
Transfer capacitance [e] (app.)	1500 pF/km
Signal velocity [c] (app.)	0.67
Propagation Delay (app.)	510 ns/100m
Skew at 100 MHz (app.)	40 ns/100m
Characteristic impedance at 100 MHz	100±5 Ohm
Test voltage Ueff	1.000 V
Operating voltage Ueff (max)	125 V

Frequency MHz	Attenuation dB/100m	NEXT dB	PS-NEXT dB/100	EL-FEXT dB/100m	PS-ELFEXT dB/100m	RL dB/100m
	max	min	min	min	min	min
1	2.1	62.3	62.3	60.8	60.8	23.1
4	4.0	53.3	53.3	48.8	48.8	24.5
10	6.3	47.3	47.3	40.8	40.8	25
16	8.0	44.3	44.2	36.7	36.7	25
20	9.0	42.8	42.8	34.8	34.8	25
31.25	11.4	39.9	39.9	30.9	30.9	23.6
62.5	16.5	35.4	35.4	24.9	24.9	21.5
100	21.3	32.3	32.3	20.8	20.8	20.1

4. Performance (Type and bandwidth of cables)

Acc. to EN 50173 and ISO/IEC 11801:2002(E)/ IEC61156/ YD/T1019-2001

Bandwidth: 100 MHz

5. Application

Installation cable for generic cabling systems acc. to ISO/IEC 11801 and EN 50173 (2.edition)

Ideal for all applications of Class D (Video, Data, Voice) upto 1GBE, acc. to IEEE802.3 ab, VoIP, PoE

6. Mechanical characteristic:

Bending radius:

During installation: 8*cable diameter

After installation: 4*cable diameter

Tensile strength (Max.): 625N

Crush: 1000 N/100mm

Impact (numbers of shocks): 10

Water proof at 20°C (86-100kpa): no water permeability

7. Chemical property:

Thermal characteristics:

Temperature range for fixed installation: -20°C to +60°C

Temperature range for mobile installation: 0°C to +50°C

8. Dimensions:

Type	Size	Outer diameter (mm)	Cu content (kg/km)	Cu Index (kg/km)	Sheath color
DA-F-02YS2Y 25x2xAWG 24/1	25P	14	201 (approx)	95,9 (approx)	Black RAL6008

9. Package:

305m/box

500m/drum

1000m/drum

10. Article number:

DA-124251-000